

The WC1 Series provide precision measurement for sub-metering, controls and energy management without interrupting the power line. Ergonomically designed with secure hinge for easy installation, this CT is the smallest in our WC Series.



### FEATURES

- 0.72" x 0.62" window opening (ID)
- Secure latch for easy installation
- Swing open by pulling on latch
- Rigid housing case with UL 94V-0 durable plastic
- 6ft black/white twisted pair wire leads— 22AWG
- Phoenix style and other terminals (optional)

### APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

### SPECIFICATIONS\*


- Standard Input Current 25A-100A
- Frequency 50Hz — 400Hz
- Custom design Turn-Ratios available
- Standard accuracy 0.5 (ANSI C12.20)
- Approximate weight 0.27Lbs
- Clamping voltage on selected models
- ANSI C57.13 Standard

\*Specifications subject to change without notice

### STANDARD PART-NUMBERS

WATTCORE P/N	INPUT RATING	AVAILABLE OUTPUTS (XXXX)
WC1-025-XXXX	25A	<p>CURRENT OUTPUTS @ 20mA and 100mA</p> <p>VOLTAGE OUTPUTS @ 250mV, 333mV, 500mV, 1V and 2V</p>
WC1-050-XXXX	50A	
WC1-080-XXXX	80A	
WC1-100-XXXX	100A	

### DIMENSIONS (Inches)

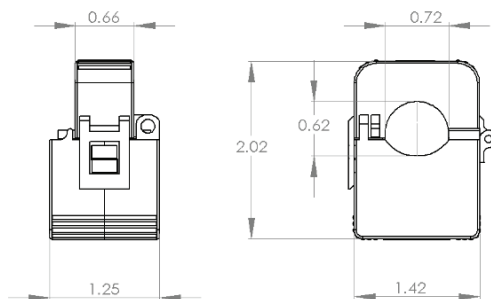

#### CAUTION

Before installation, safety precautions must be followed by licensed professional. Never energize primary unless short circuited terminals or burden connected to secondary.



Copyright © 2012 WATTCORE LLC