

The WC3 Series provide precision measurement for sub-metering, controls and energy management without interrupting the power line. Ergonomically designed with secure tabs and tampered proof case enclosure, this CT offers compactness and high performance accuracy.



### FEATURES

- 0.75" x 0.93" window opening (ID)
- Secure tabs and anti-tampering enclosure
- Pull to open for ease of installation
- Rigid housing case with durable UL 94V-0 plastic
- 6ft black/white twisted pair wire leads— 22AWG
- Phoenix style and other terminals (optional)

### APPLICATIONS

- Energy and sub-metering products
- Electrical load monitoring
- Network equipment
- Instruments and sensors
- Control systems
- Go GREEN initiatives

### SPECIFICATIONS\*


- Standard Input Current 50A-300A
- Frequency 50Hz — 400Hz
- Custom design Turn-Ratios available
- Standard accuracy 0.5 (ANSI C12.20)
- Approximate weight 0.23Lbs
- Clamping voltage on selected models
- ANSI C57.13 Standard

\*Specifications subject to change without notice

### STANDARD PART-NUMBERS

WATTCORE P/N	INPUT RATING	AVAILABLE OUTPUTS (XXXX)
WC3-50-XXXX	50A	CURRENT OUTPUTS @ 20mA and 100mA VOLTAGE OUTPUTS @ 250mV, 333mV, 500mV, 1V and 2V
WC3-100-XXXX	100A	
WC3-200-XXXX	200A	
WC3-300-XXXX	300A	

### DIMENSIONS (Inches)

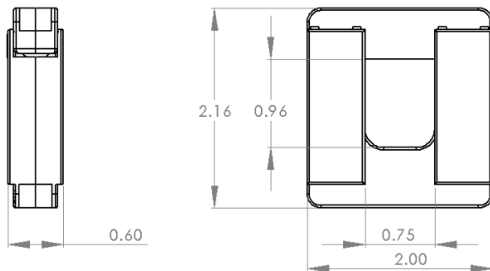

#### CAUTION

Before installation, safety precautions must be followed by licensed professional. Never energize primary unless short circuited terminals or burden connected to secondary.



Copyright © 2012 WATTCORE LLC